



Add Power to Your Work



Miniloaders


About us

Norcar miniloaders are manufactured on the west coast of Finland. The country that is known for technical knowhow and ingenious inventions, smart work, and better solutions. We Finns are famous for our diligence, we do not quit until it is perfect. Norcar is the essence of all this, a smarter way of doing things.

Norcar has been developing and marketing high quality miniloaders since 1998 (est. 1979). During the years we have expanded our product line to meet the demands and expectations of our customers. The steadily growing assortment of attachments offers the possibility to perform different tasks easily and effectively. Our most common customers are people working in green area maintenance, entrepreneurs, agriculture and janitorial.

A Norcar miniloader is an excellent support in performing tasks both in- and outdoors. We only use high quality materials and carefully selected components for our products. This provides robust and durable loaders for all conditions year after year.

We care about our customers. And one of the most important parts of our work at Norcar is to offer the best possible technical support and service in close cooperation with you, our customers.

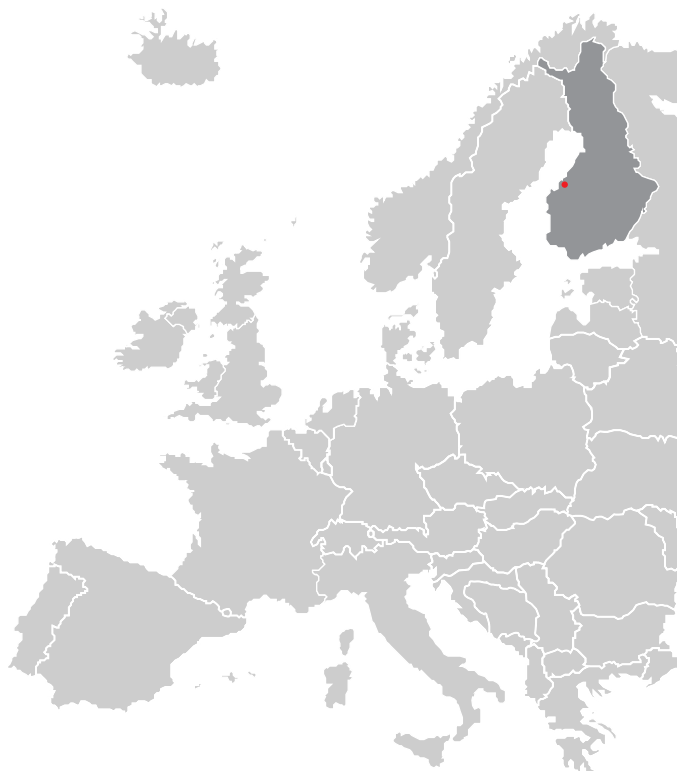

Content

Miniloaders

755 xc.....	6
a6020	8
a6026.....	10
a60E1.....	12
a6226.....	14
a7035	16
a7240	18
a7245	20
a7750	22

Comfort Cabin

Standard equipment.....	24
Technical information.....	24
Options for comfort cabin	25

Additional options

Driving options.....	26
Boom options	27
Hydraulics.....	28

Traffic.....	29
Extra options	32
Counterweight systems	34
Wheels	35

A Robust and Durable Loader for All Conditions



Uncompromising Articulated Frame Steering

With our oscillating articulated frame steering, the loader stands firmly on all wheels regardless of the terrain, making it extremely easy to maneuver.

Because the front and rear carriage oscillate independently and optimal traction is achieved. The operator easily senses the impact of the ground and the stability of the machine. The swivel angle of the articulated frame steering allows for a very tight turning radius, which is a valued feature on all Norcar loaders.

Strong and Robust

Thanks to its compact but powerful telescopic boom and front frame, the machine is strong and well balanced. The centered lifting boom provides good conditions for a long life and unbeatable visibility. The telescopic boom extends the loader's range of use with higher load heights and greater reach. Because the telescopic boom is short in the retracted position, the machine is stable even when handling heavy loads.

Parallel levelling makes the machine safe and efficient when using pallet forks, as the attachment is always kept in the set position regardless of the height of the lifting beam. The parallel levelling also provides more lifting power. Norcar loaders are compact and designed to have as low a center of gravity as possible, reducing the risk of tipping over, even in difficult terrain.





Easy to Maneuver

For work with tools that require a continuous high flow of oil, such as lawn mowers, brush cutters and tillers, there is a hand throttle. Although the engine speed is kept constant, the driving speed can be infinitely adjusted.

For optimum comfort and efficiency, both external hydraulics and the telescopic boom are controlled via push buttons on the joystick. The driver does not have to let go of the steering wheel or the joystick, but can focus all his attention on the work at hand.



Top-class Service and Safety

Norcar mini-loaders (a-series) are equipped with hydraulic brakes and an advanced safety system. The brakes are automatically applied when the driver moves away from the seat. The loader cannot be driven until the driver is seated and the brakes are deactivated.

Maintenance and machine control is easy on all Norcar mini loaders. By simply lifting the hood, you have access to all service points for daily checks and cleaning.

Norcar loaders are equipped with an open ROPS certified roll cage as standard, that protects the driver from all directions. The roll cage is also equipped with a steel roof (FOPS) that protects the operator from falling objects.





Ergonomic with Great Visibility

Norcar loaders have the driver's seat placed on the rear frame like larger wheel loaders. You sit in the correct place to feel and control the loader's movements, which makes for a safe, smooth and controlled driving experience.

The low front end and compact telescopic boom of the loader ensures excellent forward visibility. The driver always has a good view of the attachment and the position of the wheels. This provides a smooth ride and allows you to perform your work with high precision.



755xc

The little giant

Norcar's smallest miniloader, the 755xc, is an adaptable and versatile machine for the private user, but also withstands tough professional jobs. With its tight turning radius and compact construction, it is very efficient in confined spaces. The 755xc has high traction in relation to its weight. The drivetrain is hydrostatic and is controlled by a direction pedal.



Dimensions

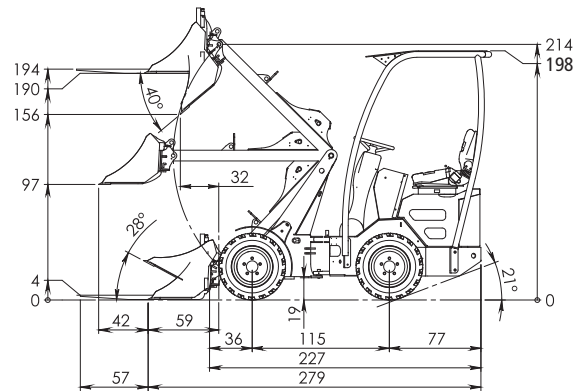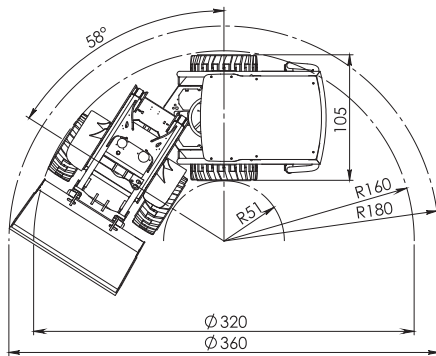

Specifications

Engine

Make.....	Kubota
Model.....	722 Stage V
Cylinders.....	3
Fuel type.....	Diesel
Cylinder volume (cm ³).....	719
Cooling system.....	Fluid

Power

SAE, gross power (kW/hp).....	14,9/20
Max gross torque (Nm).....	46
At engine speed (r/min).....	2600
Max engine speed without load (r/min).....	3600

Electrical system

Battery (V-Ah).....	12 - 53
Generator (A).....	40

Service volumes

Cooling system (l).....	5
Engine oil (l).....	3,2
Fuel tank (l).....	15
Hydraulic tank (l).....	40
Hydraulic system total volume (l).....	45

Performance

Lifting power hydraulic (kg).....	1150
Breakout force 50 cm (kg) (ISO 14397-2).....	900
Tipping load, straight (kg) (ISO 14397-1).....	750
Tipping load, articulated (kg).....	490
Operating weight (kg).....	960
Drive speed (km/h).....	0-13
Pulling force (kg).....	950

Hydraulic system

Working hydraulics (l/min).....	29
System pressure (bar).....	200
Drivetrain hydraulics (l/min).....	75
Drivetrain max system pressure (bar).....	300

Cycle times


Raising boom (s).....	2,8
Lowering boom (s).....	2,1
Folding in bucket (s).....	1,7
Tipping bucket (s).....	2,1
Steering wheel rotations L/R (rev).....	3,5/4,7

Tires

Dimension.....	23x8,5-12IN
----------------	-------------

Standard equipment 755xc

- Working lights, front
- Manual parking brake/safety system
- Float on the lifting boom
- Hand throttle/Foot throttle
- Hour counter, fuel light, engine heat indicator
- Suspension seat, seatbelt, armrest right
- Adjustable steering column
- ProDrive

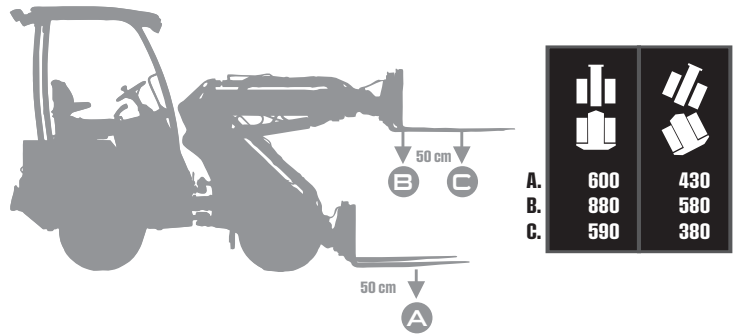

MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.



Oscillation lock
Locks the loader's pendular movement in the joint. Can be used during eg. leveling tasks when the tool needs to be parallel to the rear wheels. Choose between a freely oscillating or locked center pivot point.



Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.



Tire 23x8,5-12 IN
Durable multi-purpose tire that can withstand heavy loads. Suitable for work on harder surfaces such as asphalt, concrete, and hard packed gravel. Machine width 105 cm.

1940 mm	590 kg
20 hp	0-13 km/h





a6020

Strong, fast and agile

The market's fastest, strongest and lightest compact loader in its class. With extension boom as standard, it can reach great heights and has high lifting power while maintaining agility. The driver's seat is very comfortable and includes suspension. The adjustable steering wheel and the powered hydraulic functions are controlled directly from the ergonomic joystick. The loader's safety system activates the brakes automatically when the driver leaves the driver's seat, which ensures safe and convenient operation.



Dimensions

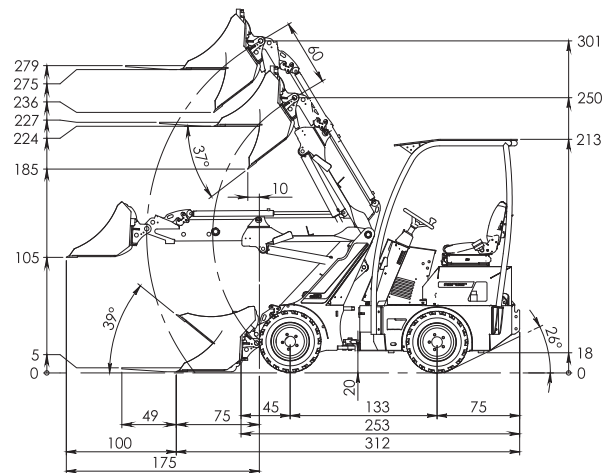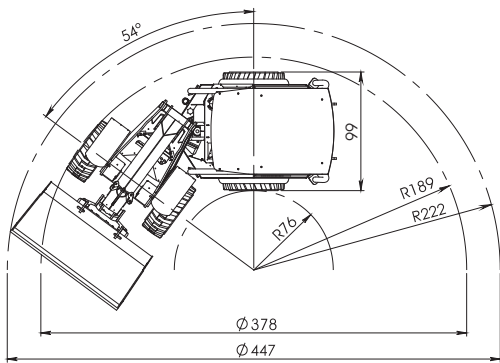

Specifications

Engine

Make	Kubota
Model	722 Stage V
Cylinders	3
Fuel type	Diesel
Cylinder volume (cm ³)	719
Cooling system	Fluid

Power

SAE, gross power (kW/hp)	14,9/20
Max gross torque (Nm)	46
At engine speed (r/min)	2600
Max engine speed without load (r/min)	3600

Electrical system

Battery (V-Ah)	12-53
Generator (A)	40

Service volumes

Cooling system (l)	6
Engine oil (l)	5
Fuel tank (l)	20
Hydraulic tank (l)	50
Hydraulic system total volume (l)	55

Performance

Lifting power hydraulic (kg)	1150
Breakout force 50 cm (kg) (ISO 14397-2)	960
Tipping load, straight (kg) (ISO 14397-1)	960
Tipping load, articulated (kg)	770
Operating weight (kg)	1320
Drive speed (km/h)	0-12,5
Pulling force (kg)	950

Hydraulic system

Working hydraulics (l/min)	29
System pressure (bar)	240
Drivetrain hydraulics (l/min)	75
Drivetrain max system pressure (bar)	350

Cycle times


Raising boom (s)	3,2
Lowering boom (s)	2,0
Folding in bucket (s)	2,2
Tipping bucket (s)	1,5
Steering wheel rotations L/R (rev)	3/4

Tires

Dimension	23 x 8,5-12 GR
-----------	----------------


Standard equipment a6020

- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Hand throttle/Foot throttle
- Engine speed and hour meter, engine heat and fuel level gauges
- Suspension seat with armrests, seatbelt
- Adjustable steering column
- ProDrive

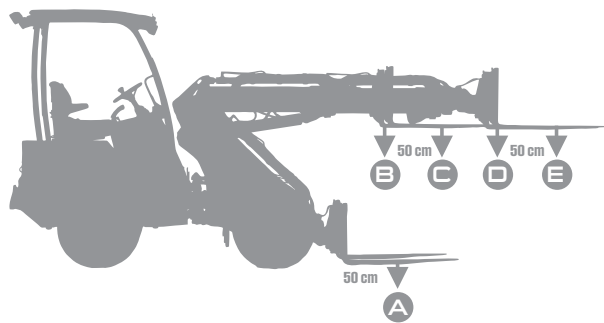


	+ 180 kg		with parallel leveller		+ 180 kg	
A.						
B.	700	700	700	700	940	640
C.	1000	730	1000	950	1180	790
D.	805	510	805	660	850	510
E.	690	440	720	570	710	440
F.	560	340	560	425	550	340


a6020




Telescope Extension Boom
600mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.



Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.



Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.



Tire 23x8,5-12 GR
Densely patterned tire. Soft tire that is gentle to surfaces and grips well. Suitable for work on soft ground like grass, gravel paths and roads. The tire is also good on snow and ice. Machine width 99 cm.

	2790 mm		805 - 1100 kg
	20 hp		0-12,5 km/h





a6026

Versatile and efficient

Norcar a6026 is essentially a versatile working machine. The stable extension boom allows high-lift tasks to be completed easily and safely. The lifting height with pallet forks is 2.8 meters. The lifting boom is simply and comfortably controlled using a joystick with an electric switch to control extension and auxiliary hydraulics. An adjustable steering wheel and a comfortable suspension seat provides a restful ride. The drive system with a foot throttle and direction pedal allows the loader to be controlled with incredible precision, even with demanding equipment and terrain. Norcar a6026 is an effective tool where jobs vary between loading trucks, shoveling snow, and moving soil.



Dimensions

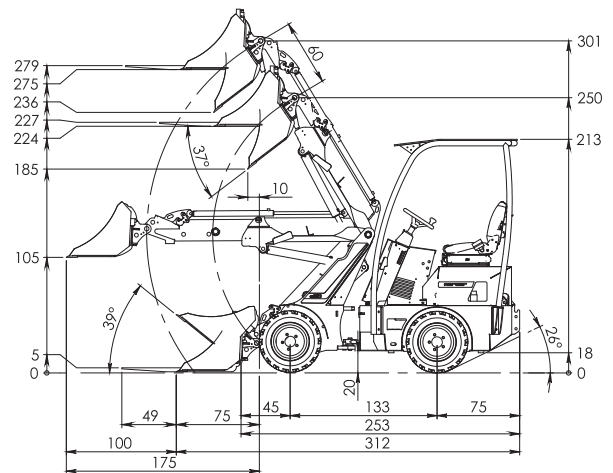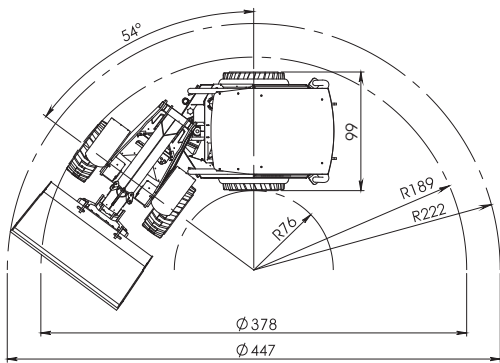

Specifications

Engine

MakeKubota
 Model1105 Stage V
 Cylinders3
 Fuel typeDiesel
 Cylinder volume (cm³).....1123
 Cooling systemFluid

Power

SAE, gross power (kW/hp).....18,5/24,8
 Max gross torque (Nm)72
 At engine speed (r/min).....2200
 Max engine speed without load (r/min).....3000

Electrical system

Battery (V-Ah).....12-53
 Generator (A).....40

Service volumes

Cooling system (l)6
 Engine oil (l)5
 Fuel tank (l)20
 Hydraulic tank (l).....50
 Hydraulic system total volume (l).....55

Performance

Lifting power hydraulic (kg).....1150
 Breakout force 50 cm (kg) (ISO 14397-2)960
 Tipping load, straight (kg) (ISO 14397-1)960
 Tipping load, articulated (kg)770
 Operating weight (kg)1320
 Drive speed (km/h).....0-11
 Pulling force (kg).....950

Hydraulic system

Working hydraulics (l/min)33
 System pressure (bar).....240
 Drivetrain hydraulics (l/min)63
 Drivetrain max system pressure (bar)350

Cycle times


Raising boom (s).....3,7
 Lowering boom (s)2,2
 Folding in bucket (s)2,6
 Tipping bucket (s)1,6
 Steering wheel rotations L/R (rev)3/4

Tires

Dimension23 x 8,5-12 GR


Standard equipment a6026

- Roll bar ROPS/FOPS, seatbelt
- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Hand throttle/Foot throttle
- Engine speed and hour meter, engine heat and fuel level gauges
- Suspension seat with armrests
- Adjustable steering column
- ProDrive

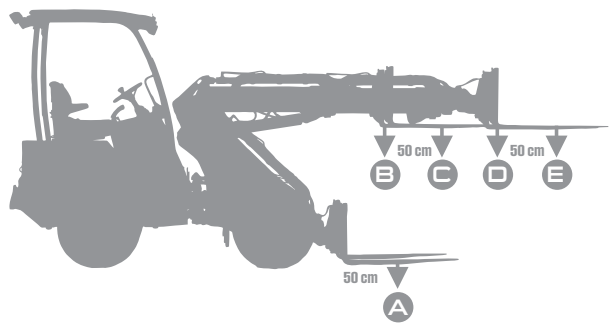


	+ 180 kg		with parallel leveller		+ 180 kg	
A.						
B.	700	700	700	700	940	640
C.	1000	730	1000	950	1180	790
D.	805	510	805	660	850	510
E.	690	440	720	570	710	440
E.	560	340	560	425	550	340


a6026




Telescope Extension Boom
600mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.



Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.



Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.



Tire 23x8,5-12 GR
Densely patterned tire. Soft tire that is gentle to surfaces and grips well. Suitable for work on soft ground like grass, gravel paths and roads. The tire is also good on snow and ice. Machine width 99 cm.

	2790 mm		805 - 1100 kg
	25 hp		0-11 km/h



New model!



Electrified!

The new Norcar a60E1 gives you top performance, minimal vibrations, zero emissions and an extremely low noise level. The electric miniloader require very low maintenance and service, it is also fun, easy and safe to use. Since the miniloader is emission-free it benefits the environment, people and animals. This provides great benefits for you and your business.

Norcar a60E1 is perfect for work in sound-sensitive environments with high standards of cleanliness, both indoors and outdoors. Therefore it is well suited for work in horse stables, on farms, on construction sites, in parks and for property maintenance.



Dimensions

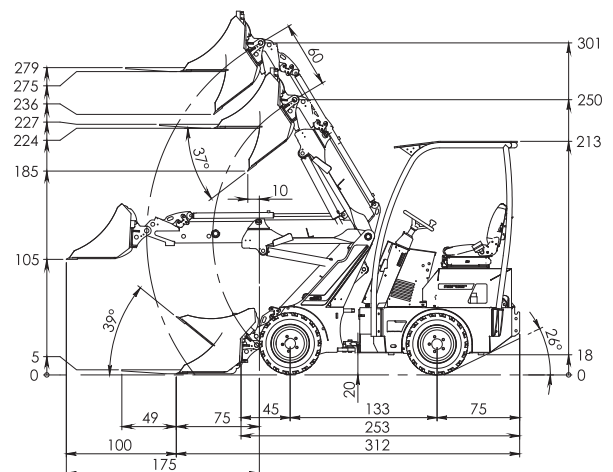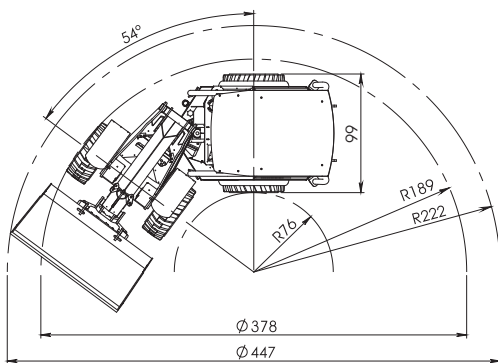

Specifications

Engine	
Driveline motor	Interior Permanent Magnet (IPM)
Driveline power (peak) (kW/hp)	9,9/13,3
Work hydr.	Interior Permanent Magnet (IPM)
Work hydraulic powe (peak) (kW/hp)	5/6,7

Power	
Gross power (kW)	10
Max gross torque (Nm)	90
Max engine speed without load (r/min)	6000

Electrical system	
Battery type	Lithium-Ion (LFP)
Battery Voltage (V)	48
Battery capacity (kWh)	11,6
Battery capacity (Ah)	240
Indicative runtime (h)	~8
Onboard charging time 230 VAC 16A (h)	~5
Auxiliary Battery Voltage (V)	12
Auxiliary Battery capacity (Ah)	12
Auxiliary power output max (W)	500


Service volumes	
Hydraulic tank (l)	50
Hydraulic system total volume (l)	55

Performance	
Breakout force 50 cm (kg) ISO14397-2	960
Tipping load, straight (kg)	960
Tipping load, articulated (kg) ISO14397-1	770
Operating weight (kg)	1470
Drive speed (km/h)	11
Pulling force high (kg)	925
Working hydraulics (l/min)	33


Tires	
Dimension	23 x 8,5 - 12 GR

Standard equipment a60E1


- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Foot throttle
- Multifunctional display
- Suspension seat with armrests, seatbelt
- Adjustable steering column
- Automotive

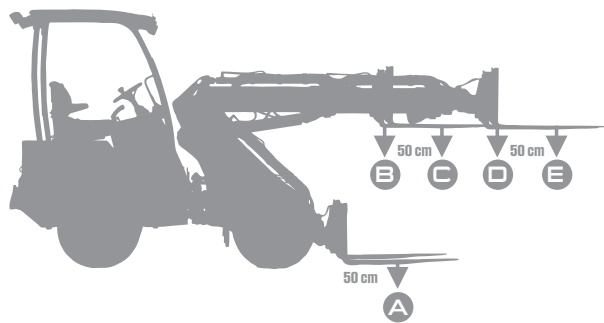


	+ 180 kg		with parallel leveller		+ 180 kg	
A.	700	700	940	640	940	780
B.	1000	730	1180	790	1200	980
C.	805	510	850	510	1100	660
D.	690	440	710	440	800	570
E.	560	340	550	340	730	425




Telescope Extension Boom
600mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.




Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.




Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.







Type 2-connector
The miniloader's lithium battery is simply charged with a standard Type 2-connector at home, at the work site or at charging stations.



Hydraulic Oil Cooler
Maintains hydraulic oil's temperature at correct level while operating tools that require high oil flow during long driving periods.



Tire 23x8,5-12 GR
Densely patterned tire. Soft tire that is gentle to surfaces and grips well. Suitable for work on soft ground like grass, gravel paths and roads. The tire is also good on snow and ice. Machine width 99 cm.

 2790 mm	 805 - 1100 kg
 20 hp	 0-11 km/h





a6226

Versatile hydraulics

Norcar a6226 has the same compact design as the a6026, but with higher specifications as standard. Equipped with dual working hydraulic pumps, the machine is well prepared for attachments requiring high oil flow. Moreover, several functions can be used simultaneously without affecting each other, which makes work more efficient. The machine offers high pulling force, speed and lifting power as standard, and is a machine for professional use.



Dimensions

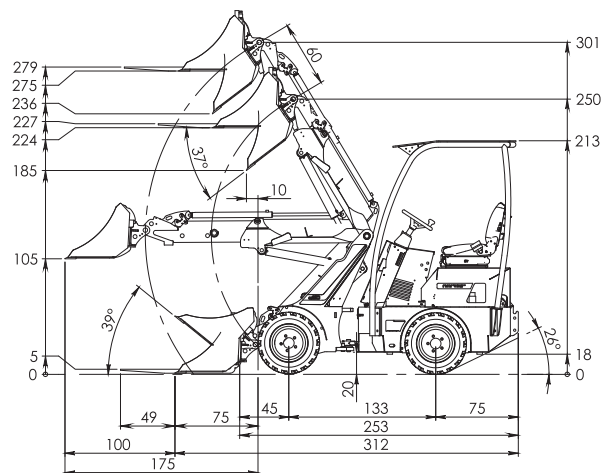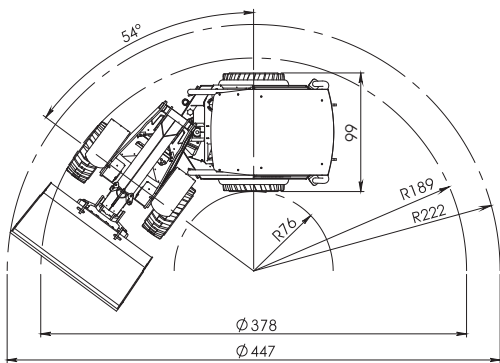

Specifications

Engine

MakeKubota
 Model1105 Stage V
 Cylinders3
 Fuel typeDiesel
 Cylinder volume (cm³).....1123
 Cooling systemFluid

Power

SAE, gross power (kW/hp).....18,5/24,8
 Max gross torque (Nm)72
 At engine speed (r/min).....2200
 Max engine speed without load (r/min).....3000

Electrical system

Battery (V-Ah).....12-53
 Generator (A).....40

Service volumes

Cooling system (l)6
 Engine oil (l)5
 Fuel tank (l)20
 Hydraulic tank (l).....50
 Hydraulic system total volume (l).....55

Performance

Lifting power hydraulic (kg).....1250
 Breakout force 50 cm (kg) (ISO 14397-2).....960
 Tipping load, straight (kg) (ISO 14397-1).....1150
 Tipping load, articulated (kg)770
 Operating weight (kg)1320
 Drive speed low (km/h)0-9
 Drive speed high (km/h).....0-18
 Pulling force high (kg)550
 Pulling force low (kg)1100

Hydraulic system

Working hydraulics (l/min)(18+24) 42
 System pressure (bar).....240
 Drivetrain hydraulics (l/min).....63
 Drivetrain max system pressure (bar)350

Cycle times


Raising boom (s).....3,7
 Lowering boom (s)2,2
 Folding in bucket (s).....2,6
 Tipping bucket (s)1,6
 Steering wheel rotations L/R (rev)3/4

Tires

Dimension23 x 8,5-12 GR


Standard equipment a6226

- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Hand throttle/Foot throttle
- Engine speed and hour meter, engine heat and fuel level gauges
- Suspension seat with armrests, seatbelt
- Adjustable steering column
- ProDrive

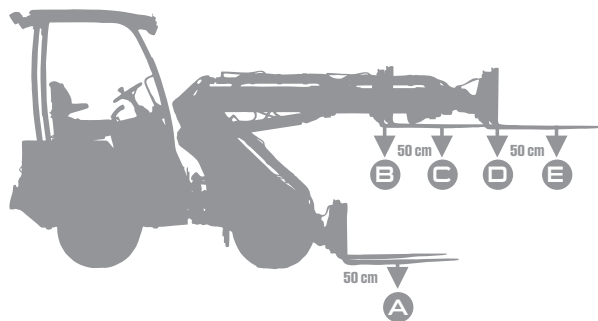


+ 180 kg


A.	940	640	940	780
B.	1180	790	1200	980
C.	850	510	1100	660
D.	710	440	800	570
E.	550	340	730	425




Telescope Extension Boom
600mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.




Hydraulic Outlet, rear, single
Single acting hydraulic outlet (R2) and free return (R3). Controls hydraulic attachments directly with joystick buttons. Rear hydraulic outlets should not be connected at the same time as hydraulic outlet, front. Hydraulic oil flow max 42 l/min.




Parallel leveller
Keeps equipment in the set position regardless of the boom's movements. Increases safety and precision during lifts, especially with pallet forks.




High Capacity Hydraulics
Dual working hydraulic pumps provide selectable flow (18/42 l/min) for hydraulic outlets. Telescope extension boom and external hydraulics work independently of each other, regardless of the boom's movements.



Hydraulic Oil Cooler
Maintains hydraulic oil's temperature at correct level while operating tools that require high oil flow during long driving periods.




Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.



Two Speed Ranges
Change between pulling force and speed. Low gear: 0-9km/h, pulling force 1100kg High gear: 0-18km/h, pulling force 550kg.



Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.



Tire 23x8,5-12 GR
Densely patterned tire. Soft tire that is gentle to surfaces and grips well. Suitable for work on soft ground like grass, gravel paths and roads. The tire is also good on snow and ice. Machine width 99 cm.

2790 mm	1100 kg
25 hp	0-9 km/h 0-18 km/h



a6226

a7035



New model!

Easy to operate

The Norcar a7035 is a perfect all-round machine that is suitable for several different segments that require a strong machine with a high lifting height. With a lifting force of up to 1500 kg and a lifting height of over 3,5 meters, the machine can handle most things for loading and material handling. This loader is particularly well suited in segments where the driver changes frequently. Therefore, the a7035 is delivered with the EasyDrive drive system to make the machine as easy to handle as possible.



Dimensions

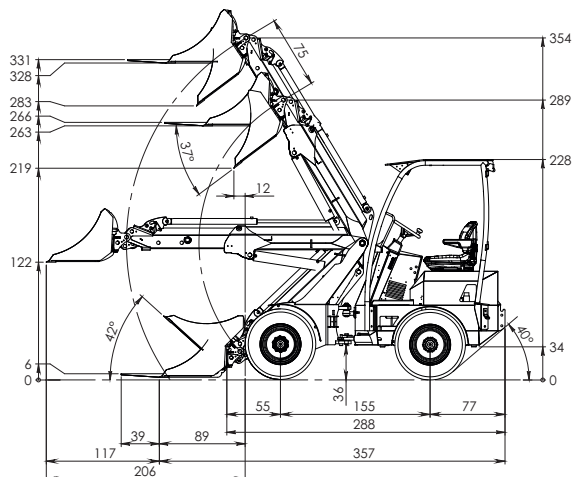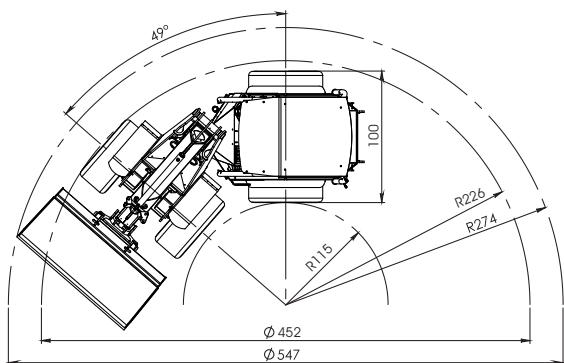

Specifications

Engine

Make	Perkins
Model	403J-11
Cylinders	3
Fuel type	Diesel
Cylinder volume (cm ³)	1131
Cooling system	Fluid

Power

SAE, gross power (kW/hp)	18,4/25
Max gross torque (Nm)	66,9
At engine speed (r/min)	2100
Max engine speed without load (r/min)	2800

Electrical system

Battery (V-Ah)	12-53
Generator (A)	65

Service volumes

Cooling system (l)	6
Engine oil (l)	5
Fuel tank (l)	20
Hydraulic tank (l)	45
Hydraulic system total volume (l)	50

Performance

Lifting power hydraulic (kg)	2100
Breakout force 50 cm (kg) (ISO 14397-2)	1250
Tipping load, straight (kg) (ISO 14397-1)	1250
Tipping load, articulated (kg)	900
Operating weight (kg)	1690
Drive speed (km/h)	0-18
Pulling force (kg)	1050

Hydraulic system

Working hydraulics (l/min)	30,8
System pressure (bar)	240
Drivetrain hydraulics (l/min)	103,6
Drivetrain max system pressure (bar)	370

Cycle times


Raising boom (s)	4,4
Lowering boom (s)	2,7
Folding in bucket (s)	3,0
Tipping bucket (s)	2,3
Steering wheel rotations L/R (rev)	4/5

Tires


Dimension	27 x 8,5-15 IN
-----------------	----------------

Standard equipment a7035


- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Hand throttle
- Engine speed and hour meter, engine heat and fuel level gauges
- Suspension seat with armrests, seatbelt
- Adjustable steering column
- EasyDrive

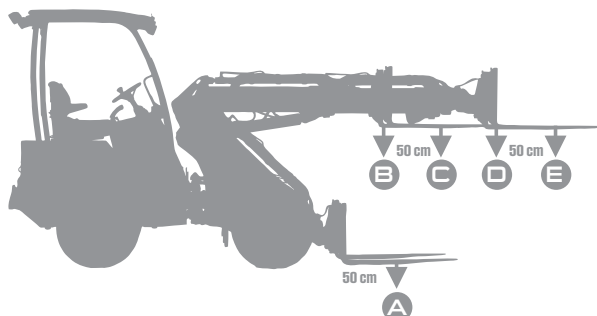


	+ 270 kg		with parallel leveller		+ 270 kg	
A.	980	780	1250	1130	1170	940
B.	1250	850	1390	1210	1500	1025
C.	840	580	1250	880	1010	700
D.	620	450	890	630	745	450
E.	560	380	780	530	675	450




Telescope Extension Boom
750mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.



Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.







Load Warning System
Load warning provides a good overview of load weight and warns of the risk of tipping. The load warning can easily be calibrated to different counter weight alternatives.



Tire 27 x 8,5 - 15 IN
Durable multi-purpose tire that can withstand heavy loads. Suitable for work on harder surfaces such as asphalt, concrete, and hard packed gravel. Machine width 100 cm.

a7035

 3310 mm	 1250 - 1500 kg
 25 hp	 0-18 km/h





a7240

Quiet and strong

The a7240, a powerful loader with great ground clearance and high specifications as standard. The four-cylinder diesel engine and dual working hydraulic pumps provides a machine that is well equipped for a wide selection of attachments in different working situations. Multiple functions can be used simultaneously without interfering with each other, making work more efficient. The pulling force goes up to an impressive number of 1550 kg. Due to the design of the hydraulic system, the boom function is fast even at lower rpms, which provides a smoother and more silent work mode with a lower fuel consumption.



Dimensions

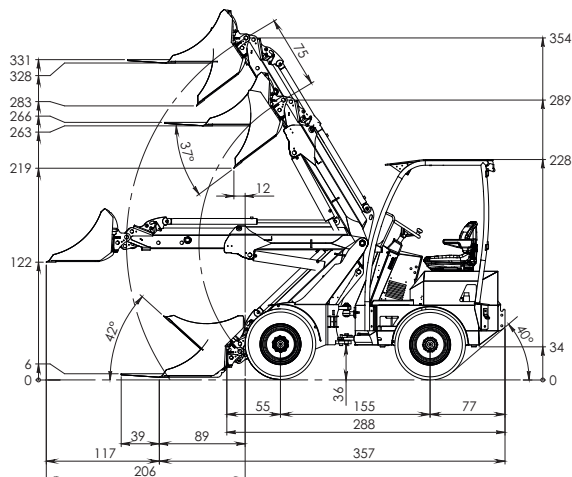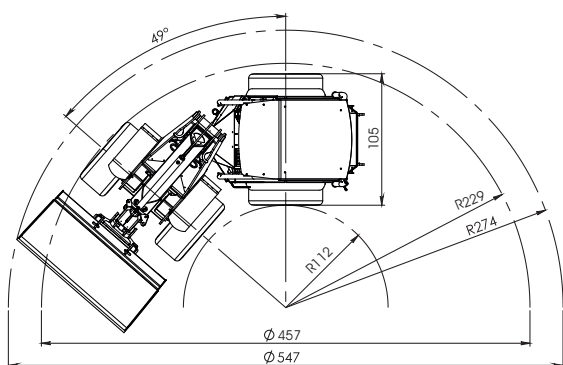

Specifications

Engine

Make	Kubota
Model	1505 Stage V
Cylinders	4
Fuel type	Diesel
Cylinder volume (cm ³)	1498
Cooling system	Fluid

Power

SAE, gross power (kW/hp)	18,5/25
Max gross torque (Nm)	93
At engine speed (r/min)	1700
Max engine speed without load (r/min)	2300

Electrical system

Battery (V-Ah)	12-53
Generator (A)	40

Service volumes

Cooling system (l)	6
Engine oil (l)	5
Fuel tank (l)	20
Hydraulic tank (l)	45
Hydraulic system total volume (l)	50

Performance

Lifting power hydraulic (kg)	2100
Breakout force 50 cm (kg) (ISO 14397-2)	1500
Tipping load, straight (kg) (ISO 14397-1)	1500
Tipping load, articulated (kg)	900
Operating weight (kg)	1790
Drive speed low (km/h)	0-9
Drive speed high (km/h)	0-19
Pulling force high (kg)	800
Pulling force low (kg)	1550

Hydraulic system

Working hydraulics (l/min)	(18+32) 50
System pressure (bar)	240
Drivetrain hydraulics (l/min)	85
Drivetrain max system pressure (bar)	370

Cycle times


Raising boom (s)	4,2
Lowering boom (s)	2,6
Folding in bucket (s)	2,9
Tipping bucket (s)	2,2
Steering wheel rotations L/R (rev)	4/5

Tires


Dimension	27 x 8,5-15 IN
-----------	----------------

Standard equipment a7240


- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Hand throttle/Foot throttle
- Engine speed and hour meter, engine heat and fuel level gauges
- Suspension seat with armrests, seatbelt
- Adjustable steering column
- ProDrive

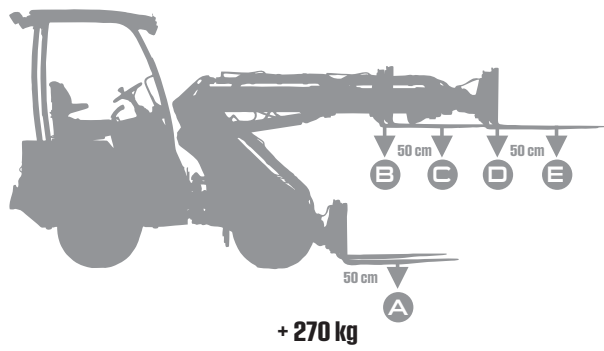


A.	1170	940	1500	1360
B.	1500	1025	1670	1450
C.	1010	700	1500	1050
D.	745	450	1070	760
E.	675	450	930	630




Telescope Extension Boom
750mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




Hydraulic Outlet, rear, single
Single acting hydraulic outlet (R2) and free return (R3). Controls hydraulic attachments directly with joystick buttons. Rear hydraulic outlets should not be connected at the same time as hydraulic outlet, front. Hydraulic oil flow max 57 l/min.




MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.




High Capacity Hydraulics
Dual working hydraulic pumps provide selectable flow (18/50 l/min) for hydraulic outlets. Telescope extension boom and external hydraulics work independently of each other, regardless of the boom's movements.




Parallel leveller
Keeps equipment in the set position regardless of the boom's movements. Increases safety and precision during lifts, especially with pallet forks.




Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.




Hydraulic Oil Cooler
Maintains hydraulic oil's temperature at correct level while operating tools that require high oil flow during long driving periods.




Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.



Two Speed Ranges
Change between pulling force and speed.
Low gear: 0-9km/h, pulling force 1550kg
High gear: 0-19km/h, pulling force 800kg.



Tire 27 x 8,5 - 15 IN
Durable multi-purpose tire that can withstand heavy loads. Suitable for work on harder surfaces such as asphalt, concrete, and hard packed gravel. Machine width 100 cm.



Load Warning System
Load warning provides a good overview of load weight and warns of the risk of tipping. The load warning can easily be calibrated to different counter weight alternatives.

3310 mm	1500 kg
25 hp	0-9 km/h 0-19 km/h



a7240

a7245



New model!

Strong in all conditions

Our new Norcar a7245 has the same format as its little brother a7035, but is equipped with a more powerful engine and a higher hydraulic oil flow, up to 61 l/min. If you use many different hydraulic tools, this is the perfect machine for you. The machine also has dual travel speeds, so you can move quickly between two points. The Norcar a7245 is also equipped with dual hydraulic oil pumps, which means that hydraulic functions can be used simultaneously without affecting each other. This makes work more efficient.



Dimensions

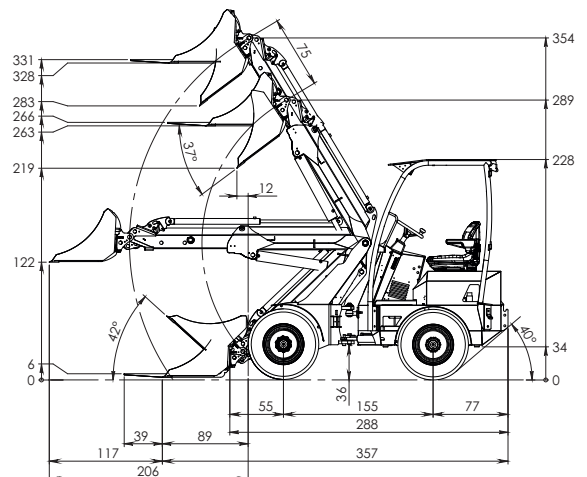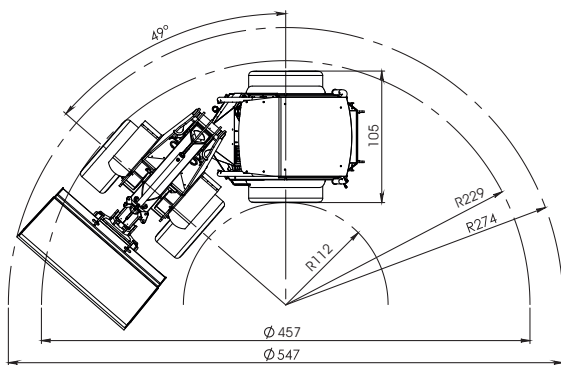


Specifications

Engine		Service volumes		Hydraulic system	
Make.....	Perkins	Cooling system (l)	5,8	Working hydraulics (l/min)	61,6
Model	403J-17	Engine oil (l)	5	System pressure (bar).....	240
Cylinders.....	3	Fuel tank (l)	20	Drivetrain hydraulics (l/min).....	103,6
Fuel	Diesel	Hydraulic tank (l).....	45	Drivetrain max system pressure (bar)	370
Cylinder volume (cm3).....	1661	Hydraulic system total volume (l).....	50		
Cooling system	Fluid				
Power		Performance		Cycle times	
SAE, gross power (kW/hp).....	18,4/25	Lifting power hydraulic (kg).....	2100	Lifting the boom (s).....	3,5
Max gross torque (Nm)	84,9	Breakout force 50 cm (kg) (ISO 14397-2).....	1500	Lowering the boom (s)	2,1
At engine speed (r/min).....	1800	Tipping load, straight (kg) (ISO 14397-1)	1500	Folding in the bucket (s)	2,4
Max engine speed without load (r/min).....	2800	Tipping load, articulated (kg)	900	Tipping the bucket (s)	1,8
		Operating weight (kg).....	1940	Steering wheel rotations L/R (rev)	4/5
		Drive speed low (km/h)	0 - 9		
		Drive speed high (km/h).....	0 - 19		
		Pulling force high (kg)	800		
		Pulling force low (kg)	1550		
Electrical system				Tires	
Battery (V-Ah).....	12-53			Dimension	27 x 8,5-15 IN
Alternator (A).....	65				


Standard equipment a7245

- Working lights, front
- Electrically maneuvered parking brake/safety system
- Float on the lifting boom
- Hand throttle/Foot throttle
- Engine speed and hour meter, engine heat and fuel level gauges
- Suspension seat with armrests, seatbelt
- Adjustable steering column
- ProDrive

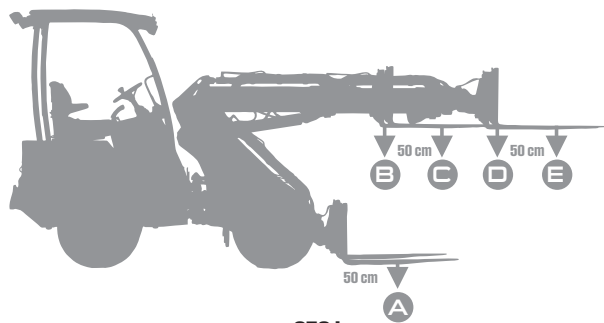


+ 270 kg


A.	1170	940	1500	1360
B.	1500	1025	1670	1450
C.	1010	700	1500	1050
D.	745	450	1070	760
E.	675	450	930	630




Telescope Extension Boom
750mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.



MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.




High Capacity Hydraulics
Dual working hydraulic pumps provide selectable flow (22/61 l/min) for hydraulic outlets. Telescope extension boom and external hydraulics work independently of each other, regardless of the boom's movements.



Parallel leveller
Keeps equipment in the set position regardless of the boom's movements. Increases safety and precision during lifts, especially with pallet forks.




Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.




Hydraulic Oil Cooler
Maintains hydraulic oil's temperature at correct level while operating tools that require high oil flow during long driving periods.




Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.



Two Speed Ranges
Change between pulling force and speed.
Low gear: 0-9km/h, pulling force 1550kg
High gear: 0-19km/h, pulling force 800kg.



Tire 27 x 8,5 - 15 IN
Durable multi-purpose tire that can withstand heavy loads. Suitable for work on harder surfaces such as asphalt, concrete, and hard packed gravel. Machine width 100 cm.



Load Warning System
Load warning provides a good overview of load weight and warns of the risk of tipping. The load warning can easily be calibrated to different counter weight alternatives.

3310 mm	1500 kg
25 hp	0-9 km/h 0-19 km/h



a7245



a7750

Stronger, faster, bigger

Norcar a7750 is bringing new technology and performance to miniloaders. The a7750 is using a 50 hp Stage V diesel engine that increases the performance in pulling force, speed and hydraulic power. The new low center of mass frame gives stability to work with full lifting power without adding extra counterweights. Norcar a7750 also comes with an upgraded driver environment thanks to the new rollover canopy. A safe workplace with easy access, good visibility and excellent ergonomics. Norcar a7750 continues with the Norcar Heavy Duty build and design. It has a centered lifting boom, welded frame and metal engine hood and covers. The a7750 is a new Norcar that is once again loaded with power.



Dimensions

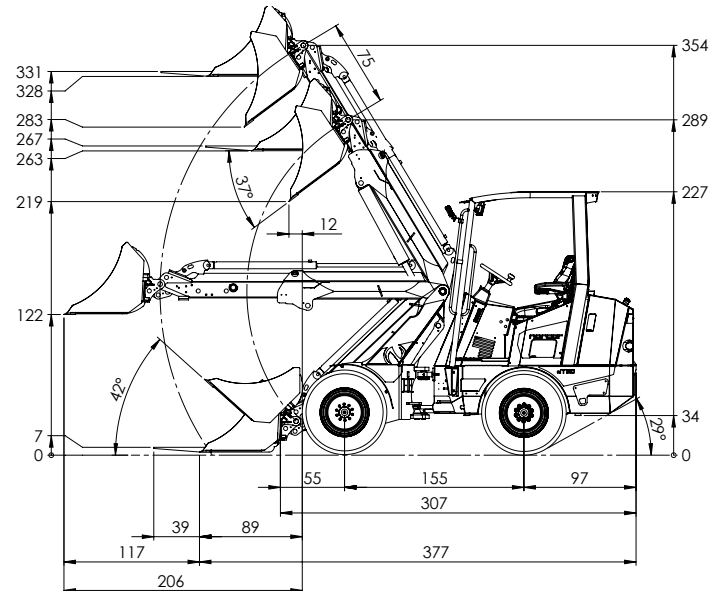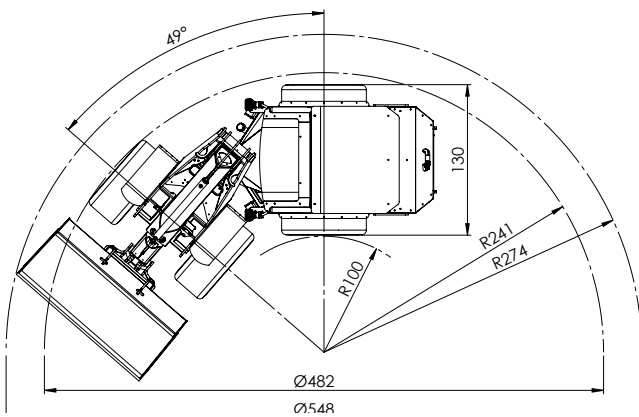

Specifications

Engine

Make.....Kubota
 ModelD 1803-CR-T E5B Stage V
 Cylinders.....3
 FuelDiesel
 Cylinder volume (cm³).....1826

Power

SAE, gross power (kW/hp).....37/49,6
 Max gross torque (Nm)150
 At engine speed (r/min).....1600
 Max engine speed without load (r/min).....2700

Electrical system

Battery (V-Ah).....12-77
 Alternator (A).....70

Service volumes

Cooling system (l)7
 Engine oil (l)7
 Fuel tank (l)27
 Hydraulic tank (l).....56
 Hydraulic system total volume (l).....61

Performance

Lifting power hydraulic (kg).....2100
 Breakout force 50 cm (kg) (ISO 14397-2).....1500
 Tipping load, straight (kg)1760
 Tipping load, articulated (kg) (ISO 14397-1).....1230
 Operating weight (kg).....2170
 Drive speed low (km/h)0 - 14
 Drive speed high (km/h).....0 - 28
 Pulling force low (kg)1900
 Pulling force high (kg).....950

Hydraulic system

Working hydraulics (l/min)68
 System pressure (bar).....240
 Drivetrain hydraulics (l/min).....124
 Drivetrain max system pressure (bar)400

Cycle times



Lifting the boom (s).....3,6
 Lowering the boom (s)2,2
 Folding in the bucket (s)2,5
 Tipping the bucket (s)2,2
 Steering wheel rotations L/R (rev)4/5

Tires


Dimension320/55-15 GR

Standard equipment a7750


- Led work lights, front (roof)
- Electrically maneuvered parking brake / automatic safety system
- Float on the lifting boom
- Hand throttle / Foot throttle
- Digital display 4,3" dashboard information
- Suspension seat with armrest, seatbelt
- Adjustable steering column
- Automotive F-N-R drive system with inching pedal

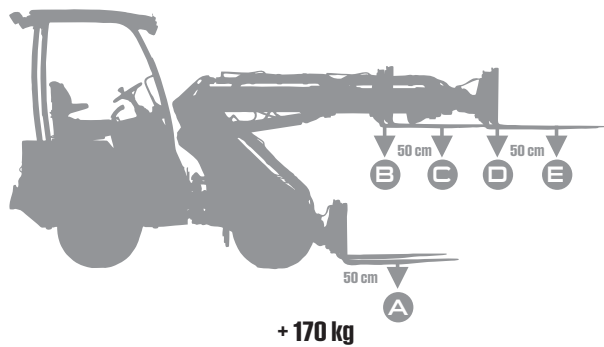Telescope Extension Boom
750mm telescope boom gives good lifting height and reach. Electronically controlled using lifting boom's joystick.




High Capacity Hydraulics
Dual working hydraulic pumps provide selectable flow (30/68 l/min) for hydraulic outlets. Telescope extension boom and external hydraulics work independently of each other, regardless of the boom's movements.




Two Speed Ranges
Change between pulling force and speed.
Low gear: 0-14 km/h, pulling force 1900 kg
High gear: 0-28 km/h, pulling force 950 kg.




Tire 320/55-15 GR
Densely patterned tire. Soft tire that is gentle to surfaces and grips well. Suitable for work on soft ground like grass, gravel paths and roads. The tire is also good on snow and ice. Machine width 127 cm.



MultiFaster Quick release coupling
Is a double-acting, electrically controlled hydraulic outlet (1 and 2) and free return (3). It controls the hydraulic implements directly from the joystick buttons. The multi-coupling makes changing hydraulic implements quick and easy. With a simple hand movement, all hydraulic hoses are connected smoothly and makes it impossible to connect incorrectly. The pressure is released automatically, and no oil leakage occurs.



Parallel leveller
Keeps equipment in the set position regardless of the boom's movements. Increases safety and precision during lifts, especially with pallet forks.




Hydraulic Oil Cooler
Maintains hydraulic oil's temperature at correct level while operating tools that require high oil flow during long driving periods.


A.	1450	1150	1500	1450
B.	1850	1300	1960*	1700
C.	1450	1150	1500	1450
D.	1150	750	1220	1000
E.	940	610	1100	850



Traction control
Provides better traction on slippery or uneven surfaces. Traction is guaranteed on the same side wheels.



Load Warning System
Load warning provides a good overview of load weight and warns of the risk of tipping. The load warning can easily be calibrated to different counter weight alternatives.



Roll cage ROPS/FOPS
A 4-pillar protective arch with waterproof steel roof that protects the driver in case of the machine tilting over and against falling objects.

3310 mm	1500 kg
50 hp	0-14 km/h 0-28 km/h



a7750

Comfort Cabin



Standard equipment

- 60 amp. alternator*
- Heated cabin
- Radio and speakers
- Windshield wiper
- LED work lights, two in the front and one in the rear
- Side window that you can open
- Cabin door that you can lock in open position
- Glass roof (helps loading/unloading)
- Warning beacon

*a7750 70 amp.



755 xc	N/A	■
a6020	7007984	■
a6026	7007486	■
a60E1	N/A	■
a6226	7007448	■
a7035	N/A	■
a7240	7007484	■
a7245	N/A	■
a7750	7008603	■





Side window that you can open

Technical information for comfort cabin



Norcar a6020
Norcar a6026
Norcar a6226

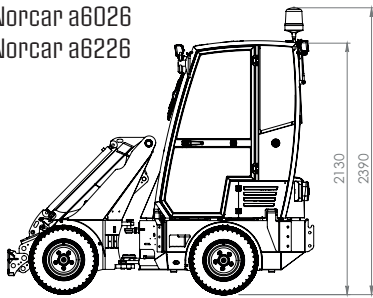

Norcar a7240

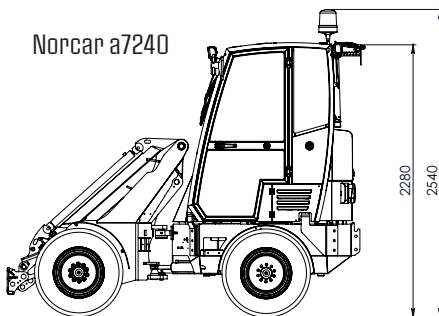

Norcar a7750

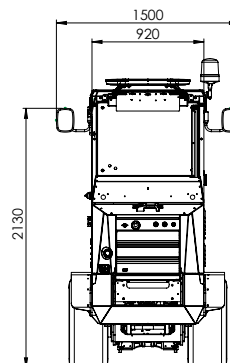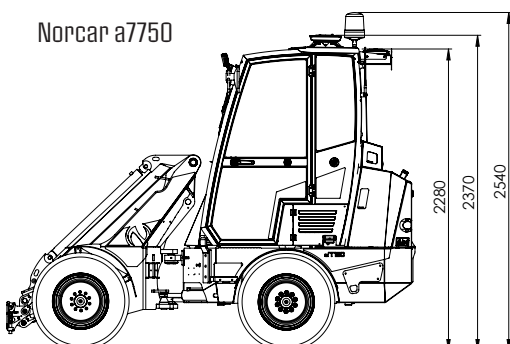

Cabin door locked in open position

Weight, kg

a6020	1530
a6026	1530
a6226	1530
a7240	1980
a7750	2200



Optional equipment for comfort cabin



Air conditioning

The cabin can be equipped with air conditioning. The cabin also heats up faster during cold days with the help of the air conditioning unit. Cabin air filter is included.

755 xc	N/A	■
a6020	N/A	■
a6026	N/A	■
a60E1	N/A	■
a6226	N/A	■
a7035	N/A	■
a7240	7007485	■
a7245	N/A	■
a7750	7008602	■



Rear view camera

The rear view can be improved by installing a rear-view camera. It makes maneuvering easier and especially when you want to put an attachment on the rear of the machine. The 5" display is placed in the corner of the windshield in line with the rear-view mirrors. The camera gives a wide angle picture and is equipped with IR for optimal night vision.

755 xc	N/A	■
a6020	7007985	■
a6026	7007569	■
a60E1	N/A	■
a6226	7007568	■
a7035	N/A	■
a7240	7007567	■
a7245	N/A	■
a7750	7007567	■



Lightbar LED

Warns surroundings of working vehicle.

755 xc	N/A	■
a6020	N/A	■
a6026	N/A	■
a60E1	N/A	■
a6226	N/A	■
a7035	N/A	■
a7240	N/A	■
a7245	N/A	■
a7750	7500120	■

Additional equipment

Driving options

easydrive

rev ← → fwd
DIRECTION

SPEED

RPM

prodrive

rev ← → fwd
DIRECTION

SPEED

RPM

automotive

rev ← → fwd
DIRECTION

SPEED

RPM

Driving a Norcar loader with the EasyDrive drive system is, as the name implies, easy.

The EasyDrive system is well-suited to situations in which there are a great number of users, e.g., for rentals, in stables and for private users. Operators quickly get used to handling the loader in a safe and efficient manner with the EasyDrive system.

755 xc	7008136
a6020	7008160
a6026	7008161
a60E1	N/A
a6226	7008162
a7035	Standard
a7240	7008163
a7245	7008163
a7750	N/A


The Norcar ProDrive drive system is an excellent choice for anyone wanting maximum control over the loader's characteristics. The ProDrive system offers you full control over both the loader's drive power and speed simultaneously. One great advantage of the ProDrive system is the ability to use the foot throttle in order quickly to adjust the engine's RPM for faster lifting and for more power, or else for calm and silent driving when the power is not needed. The ProDrive system is well-suited for work requiring a high degree of precision, e.g., working on green areas, stone paving and demolition work.


755 xc	Standard
a6020	Standard
a6026	Standard
a60E1	N/A
a6226	Standard
a7035	7008197
a7240	Standard
a7245	Standard
a7750	N/A


Norcar's Automotive drive system is a good choice for those looking to get the most from a loader. This system grants the operator total control over the engine's RPM and transmission when driving forward/backward.

The drive system is easy to run and is excellent for loading, as well as for more continuous driving along roads and streets. Operating the system can be likened to driving a car with an automatic transmission.


755 xc	N/A
a6020	7007331
a6026	7007410
a60E1	Standard
a6226	7007411
a7035	7007180
a7240	7007180
a7245	7007180
a7750	Standard


	<p>Full traction control Provides continuous traction on all wheels, regardless of terrain.</p>	755 xc	N/A	■
		a6020	7006724	■
		a6026	7001831	■
		a60E1	N/A	■
		a6226	7004522	■
		a7035	7004567	■
		a7240	7004567	■
		a7245	7004567	■
		a7750	N/A	■

	<p>Two Speed Ranges Change between pulling force and speed.</p> <p>a6026 Low gear: 0-9km/h, pulling force 1100kg High gear: 0-18km/h, pulling force 550kg.</p>	755 xc	N/A	■
		a6020	N/A	■
		a6026	7001739	■
		a60E1	N/A	■
		a6226	Standard	■
		a7035	N/A	■
		a7240	Standard	■
		a7245	Standard	■
		a7750	Standard	■

	<p>Speed control Feature for maintaining fixed driving speed when engine speed is adjusted to maintain continuous flow for hydraulically powered tools ie. lawnmower.</p>	755 xc	N/A	■
		a6020	N/A	■
		a6026	N/A	■
		a60E1	N/A	■
		a6226	N/A	■
		a7035	N/A	■
		a7240	N/A	■
		a7245	N/A	■
		a7750	7008568	■

Boom options

	<p>Parallel leveller Keeps equipment in the set position regardless of the boom's movements. Increases safety and precision during lifts, especially with pallet forks. Parallel leveller also increases the lifting power by 20%.</p>	755 xc	N/A	■
		a6020	7006740	■
		a6026	7001741	■
		a60E1	7001741	■
		a6226	Standard	■
		a7035	7500362	■
		a7240	Standard	■
		a7245	Standard	■
		a7750	Standard	■

	<p>Hydraulic Quick Lock Change attachments quickly and easily without leaving the driver's seat.</p>	755 xc	N/A	■
		a6020	7006730	■
		a6026	7005416	■
		a60E1	7005416	■
		a6226	7005417	■
		a7035	7004569	■
		a7240	7004569	■
		a7245	7004569	■
		a7750	7004569	■



EURO/Trima/SMS

Attachment coupling plate EURO/Trima/SMS with hydraulically operated locking pins

755 xc	N/A	■
a6020	7500358	■
a6026	7500358	■
a60E1	7500358	■
a6226	7500358	■
a7035	7500358	■
a7240	7500358	■
a7245	7500358	■
a7750	7500358	■

Hydraulics



Extra Hydraulic Outlet, front

Electrically operated double-acting hydraulic outlet (4 and 5). Provides the ability to control several hydraulic functions on attachments directly with buttons on the joystick.

755 xc	N/A	■
a6020	7006727	■
a6026	7001743	■
a60E1	7001743	■
a6226	7004509	■
a7035	7004571	■
a7240	7004571	■
a7245	7004571	■
a7750	7004571	■



Hydraulic Outlet, rear

Single acting hydraulic outlet (R1) and free return (R3). Controls hydraulic attachments directly with joystick buttons. Rear hydraulic outlets should not be connected at the same time as hydraulic outlet, front.

755 xc	N/A	■
a6020	7006731	■
a6026	7001742	■
a60E1	N/A	■
a6226	Standard	■
a7035	N/A	■
a7240	Standard	■
a7245	N/A	■
7750 xc	N/A	■



Hydraulic Double Outlet, rear

Double acting hydraulic outlet (R1, R2) and free return (R3). Controls hydraulic attachments directly with joystick buttons. Rear hydraulic outlets should not be connected at the same time as hydraulic outlet, front.



755 xc	N/A	■
a6020	7006763	■
a6026	7007038	■
a60E1	N/A	■
a6226	7007039	■
a7035	7500357	■
a7240	7004573	■
a7245	7500357	■
a7750	7008592	■



Hydraulic Oil Cooler

Maintains hydraulic oil's temperature at correct level while operating tools that require high oil flow during long driving periods.

755 xc	N/A	■
a6020	7006739	■
a6026	7001835	■
a60E1	Standard	■
a6226	Standard	■
a7035	7500361	■
a7240	Standard	■
a7245	Standard	■
a7750	Standard	■

Traffic



Engine Pre-heater

Improves starting ability and decreases wear during cold starts. Recommended plug-in time 30 min.

755 xc	7001842	■
a6020	7006734	■
a6026	7001748	■
a60E1	N/A	■
a6226	7004516	■
a7035	7004574	■
a7240	7004574	■
a7245	7004574	■
a7750	7008578	■



Traffic Equipment

Lights and equipment necessary for driving on public roads. Inspection and registration is required for driving on public roads and can vary between countries. Consult your dealer for advice regarding inspection in your region.

755 xc	7001852	■
a6020	7006747	■
a6026	7001825	■
a60E1	7001825	■
a6226	7004520	■
a7035	7004578	■
a7240	7004578	■
a7245	7004578	■
a7750	7008564	■



3-Pin control outlet, front and rear

3-Pin outlet for operating the attachment's electrical functions, conveniently controlled from the dashboard. Front outlet is integrated in the multifaster. (DIN 9680)

755 xc	N/A	■
a6020	N/A	■
a6026	N/A	■
a60E1	N/A	■
a6226	N/A	■
a7035	N/A	■
a7240	N/A	■
a7245	N/A	■
a7750	7008569	■



7-Pin trailer outlet

7-Pin outlet for trailer. Only available with traffic equipment.

755 xc	N/A	■
a6020	N/A	■
a6026	N/A	■
a60E1	N/A	■
a6226	N/A	■
a7035	N/A	■
a7240	N/A	■
a7245	N/A	■
a7750	7008570	■



Beacon light

Warns surroundings of working vehicle.

755 xc	7007534	■
a6020	7006743	■
a6026	7001750	■
a60E1	7001750	■
a6226	7004518	■
a7035	7004576	■
a7240	7004576	■
a7245	7004576	■
a7750	7004576	■



Rear view mirrors

Rear view mirrors mounted on each side of the loader provide a comfortable and secure drive.

755 xc	7007535	■
a6020	7006719	■
a6026	7002604	■
a60E1	7002604	■
a6226	7004533	■
a7035	7004582	■
a7240	7004582	■
a7245	7004582	■
a7750	7008565	■



Pro LED work lights

Work lighting with efficient LED fixtures. The lighting package contains of LED fixture mounted at the front, rear and sides of the machine (depending on the model), as well as a fixture mounted on the front end to provide effective lighting for the attachment.

755xc - 4 pcs / a60 and a70 -series - 7 pcs / a7750 - 5 pcs

755 xc	7007533*	■
a6020	7006718	■
a6026	7006036	■
a60E1	7500559	■
a6226	7006037	■
a7035	7006038	■
a7240	7006038	■
a7245	7006038	■
a7750	7008566**	■



Catalytic converter

Catalyst reduces diesel emissions.

755 xc	7008250	■
a6020	7007637	■
a6026	7007638	■
a60E1	N/A	■
a6226	7007639	■
a7035	7006396	■
a7240	7006396	■
a7245	7006396	■
a7750	N/A	■



Load warning system

Load warning provides a good overview of load weight and warns of the risk of tipping. The load warning can easily be calibrated to different counter weight alternatives.

755 xc	N/A	■
a6020	7008237	■
a6026	7008238	■
a60E1	7008238	■
a6226	7008239	■
a7035	Standard	■
a7240	Standard	■
a7245	Standard	■
a7750	Standard	■



Fender flares

Heavy-duty fender flares

755 xc	N/A	■
a6020	N/A	■
a6026	N/A	■
a60E1	N/A	■
a6226	N/A	■
a7035	7007645	■
a7240	7007645	■
a7245	7007645	■
a7750	7007645	■



Alternator 60A

A more effective alternator for machines with high power consumption. Recommended for machines with traffic equipment and cab with heat.

755 xc	N/A	■
a6020	7006729	■
a6026	7003279	■
a60E1	N/A	■
a6226	7004535	■
a7035	N/A	■
a7240	7004621	■
a7245	N/A	■
7750	N/A	■

* 755 xc: Two led lights pointing back and forward.

** a7750: High performance LED work lights in front, rear and under lifting boom. 6600 lumen total.



Rear Working Lights

Effective lighting, mounted at the back of the protective cage.


755 xc	N/A	■
a6020	7006715	■
a6026	7001749	■
a60E1	7500558	■
a6226	7004517	■
a7035	7004584	■
a7240	7004584	■
a7245	7004584	■
7750	N/A	■



Windshield

Protects against flying debris when working, for example, with flail shredder, hydraulic hammer, or snow blower.
Windshield wipers and washer included.

755 xc	N/A	■
a6020	7006750	■
a6026	7002318	■
a60E1	7002318	■
a6226	7004527	■
a7035	7004586	■
a7240	7004586	■
a7245	7004586	■
a7750	7008567	■



Vehicle motion alarm

Warns passers-by that the machines is moving in reverse.

755 xc	N/A	■
a6020	7007646	■
a6026	7007646	■
a60E1	N/A	■
a6226	7007646	■
a7035	7007646	■
a7240	7007646	■
a7245	7007646	■
a7750	7500248	■



Extra options

	<p>Armrest, left Provides a more comfortable and restful drive. Recommended for machines driven for longer periods of time in traffic and for landscaping.</p>	<table border="0"> <tr><td>755 xc</td><td>7001851</td><td>■</td></tr> <tr><td>a6020</td><td>Standard</td><td>■</td></tr> <tr><td>a6026</td><td>Standard</td><td>■</td></tr> <tr><td>a60E1</td><td>Standard</td><td>■</td></tr> <tr><td>a6226</td><td>Standard</td><td>■</td></tr> <tr><td>a7035</td><td>Standard</td><td>■</td></tr> <tr><td>a7240</td><td>Standard</td><td>■</td></tr> <tr><td>a7245</td><td>Standard</td><td>■</td></tr> <tr><td>a7750</td><td>Standard</td><td>■</td></tr> </table>	755 xc	7001851	■	a6020	Standard	■	a6026	Standard	■	a60E1	Standard	■	a6226	Standard	■	a7035	Standard	■	a7240	Standard	■	a7245	Standard	■	a7750	Standard	■
755 xc	7001851	■																											
a6020	Standard	■																											
a6026	Standard	■																											
a60E1	Standard	■																											
a6226	Standard	■																											
a7035	Standard	■																											
a7240	Standard	■																											
a7245	Standard	■																											
a7750	Standard	■																											
	<p>Seat heater Heat in the seat's sitting part increases comfort when driving in cold weather.</p>	<table border="0"> <tr><td>755 xc</td><td>7001848</td><td>■</td></tr> <tr><td>a6020</td><td>7006757</td><td>■</td></tr> <tr><td>a6026</td><td>7001747</td><td>■</td></tr> <tr><td>a60E1</td><td>7001747</td><td>■</td></tr> <tr><td>a6226</td><td>7004515</td><td>■</td></tr> <tr><td>a7035</td><td>7004605</td><td>■</td></tr> <tr><td>a7240</td><td>7004605</td><td>■</td></tr> <tr><td>a7245</td><td>7004605</td><td>■</td></tr> <tr><td>a7750</td><td>7004605</td><td>■</td></tr> </table>	755 xc	7001848	■	a6020	7006757	■	a6026	7001747	■	a60E1	7001747	■	a6226	7004515	■	a7035	7004605	■	a7240	7004605	■	a7245	7004605	■	a7750	7004605	■
755 xc	7001848	■																											
a6020	7006757	■																											
a6026	7001747	■																											
a60E1	7001747	■																											
a6226	7004515	■																											
a7035	7004605	■																											
a7240	7004605	■																											
a7245	7004605	■																											
a7750	7004605	■																											
	<p>Comfort seat Comfort seat MSG 65.</p>	<table border="0"> <tr><td>755 xc</td><td>N/A</td><td>■</td></tr> <tr><td>a6020</td><td>7006758</td><td>■</td></tr> <tr><td>a6026</td><td>7006834</td><td>■</td></tr> <tr><td>a60E1</td><td>7006834</td><td>■</td></tr> <tr><td>a6226</td><td>7006832</td><td>■</td></tr> <tr><td>a7035</td><td>7006830</td><td>■</td></tr> <tr><td>a7240</td><td>7006830</td><td>■</td></tr> <tr><td>a7245</td><td>7006830</td><td>■</td></tr> <tr><td>a7750</td><td>7006830</td><td>■</td></tr> </table>	755 xc	N/A	■	a6020	7006758	■	a6026	7006834	■	a60E1	7006834	■	a6226	7006832	■	a7035	7006830	■	a7240	7006830	■	a7245	7006830	■	a7750	7006830	■
755 xc	N/A	■																											
a6020	7006758	■																											
a6026	7006834	■																											
a60E1	7006834	■																											
a6226	7006832	■																											
a7035	7006830	■																											
a7240	7006830	■																											
a7245	7006830	■																											
a7750	7006830	■																											



Comfort seat, electrically heated

Comfort seat with electrically heated seat and back

755 xc	N/A	■
a6020	7006759	■
a6026	7006835	■
a60E1	7006835	■
a6226	7006833	■
a7035	7006831	■
a7240	7006831	■
a7245	7006831	■
a7750	7006831	■



Oscillation lock

Locks the loader's pendular movement in the joint. Can be used during eg. leveling tasks when the tool needs to be parallel to the rear wheels.

755 xc	Standard	■
a6020	7006741	■
a6026	7002337	■
a60E1	7002337	■
a6226	7004532	■
a7035	7504619	■
a7240	7004619	■
a7245	7004619	■
a7750	7004619	■



Mounting plate

Mounting plate for attaching hitch.



755 xc	N/A	■
a6020	7006737	■
a6026	7001923	■
a60E1	7001923	■
a6226	7004525	■
a7035	7004609	■
a7240	7004609	■
a7245	7004609	■
a7750	7008600	■



Hitch

Hitch with standard 50 mm ball.

755 xc	7001845	■
a6020	7006722	■
a6026	7001836	■
a60E1	7001836	■
a6226	7004523	■
a7035	7004611	■
a7240	7004611	■
a7245	7004611	■
a7750	7004611	■



Hitch combo

Hitch with standard 50 mm ball combined with pin for trailer towing eye.

755 xc	7001846	■
a6020	7006723	■
a6026	7001837	■
a60E1	7001837	■
a6226	7004524	■
a7035	7004613	■
a7240	7004613	■
a7245	7004613	■
a7750	7004613	■








Bottom armour

Steel plate mounted below the engine and front frame, protects the machine when working in difficult terrain.

755 xc	N/A	■
a6020	7006720	■
a6026	7001751	■
a60E1	7001751	■
a6226	7004519	■
a7035	N/A	■
a7240	7004607	■
a7245	N/A	■
a7750	7008588	■

Counterweight systems

	<p>Counterweight bracket Handy and compact counterweight for a-series loaders. The counterweight's and accessories' bracket is installed easily with a bolted connection on the chassis. Counterweights are selected as needed and locked in place with a through bolt. The counterweights are designed with lifting points and notches in order to facilitate manual handling. Hitch can be attached to the counterweight bracket.</p>	<table border="0"> <tr><td>755 xc</td><td>N/A</td><td>■</td></tr> <tr><td>a6020</td><td>7008284</td><td>■</td></tr> <tr><td>a6026</td><td>7008284</td><td>■</td></tr> <tr><td>a60E1</td><td>7008284</td><td>■</td></tr> <tr><td>a6226</td><td>7008284</td><td>■</td></tr> <tr><td>a7035</td><td>7008284</td><td>■</td></tr> <tr><td>a7240</td><td>7008284</td><td>■</td></tr> <tr><td>a7245</td><td>7008284</td><td>■</td></tr> <tr><td>a7750</td><td>N/A</td><td>■</td></tr> </table>	755 xc	N/A	■	a6020	7008284	■	a6026	7008284	■	a60E1	7008284	■	a6226	7008284	■	a7035	7008284	■	a7240	7008284	■	a7245	7008284	■	a7750	N/A	■
755 xc	N/A	■																											
a6020	7008284	■																											
a6026	7008284	■																											
a60E1	7008284	■																											
a6226	7008284	■																											
a7035	7008284	■																											
a7240	7008284	■																											
a7245	7008284	■																											
a7750	N/A	■																											
	<p>Counterweight 27 kg Counterweights are selected as needed and locked in place with a through bolt. The counterweights are designed with lifting points and notches in order to facilitate manual handling. a6020, a6026 and a6226 max 8 a7240 max 12 a7750 max 5</p>	<table border="0"> <tr><td>755 xc</td><td>N/A</td><td>■</td></tr> <tr><td>a6020</td><td>7500385</td><td>■</td></tr> <tr><td>a6026</td><td>7500385</td><td>■</td></tr> <tr><td>a60E1</td><td>7500385</td><td>■</td></tr> <tr><td>a6226</td><td>7500385</td><td>■</td></tr> <tr><td>a7035</td><td>7500385</td><td>■</td></tr> <tr><td>a7240</td><td>7500385</td><td>■</td></tr> <tr><td>a7245</td><td>7500385</td><td>■</td></tr> <tr><td>a7750</td><td>N/A</td><td>■</td></tr> </table>	755 xc	N/A	■	a6020	7500385	■	a6026	7500385	■	a60E1	7500385	■	a6226	7500385	■	a7035	7500385	■	a7240	7500385	■	a7245	7500385	■	a7750	N/A	■
755 xc	N/A	■																											
a6020	7500385	■																											
a6026	7500385	■																											
a60E1	7500385	■																											
a6226	7500385	■																											
a7035	7500385	■																											
a7240	7500385	■																											
a7245	7500385	■																											
a7750	N/A	■																											
	<p>Side weight kit 100 kg 3+3 The side weights are 17 kg each and provides a total counterweight of 100 kg. The side weights are mounted on both sides of the machine as a kit with a total of 6 weight plates (3+3).</p>	<table border="0"> <tr><td>755 xc</td><td>N/A</td><td>■</td></tr> <tr><td>a6020</td><td>N/A</td><td>■</td></tr> <tr><td>a6026</td><td>N/A</td><td>■</td></tr> <tr><td>a60E1</td><td>N/A</td><td>■</td></tr> <tr><td>a6226</td><td>N/A</td><td>■</td></tr> <tr><td>a7035</td><td>N/A</td><td>■</td></tr> <tr><td>a7240</td><td>N/A</td><td>■</td></tr> <tr><td>a7245</td><td>N/A</td><td>■</td></tr> <tr><td>a7750</td><td>7500031</td><td>■</td></tr> </table>	755 xc	N/A	■	a6020	N/A	■	a6026	N/A	■	a60E1	N/A	■	a6226	N/A	■	a7035	N/A	■	a7240	N/A	■	a7245	N/A	■	a7750	7500031	■
755 xc	N/A	■																											
a6020	N/A	■																											
a6026	N/A	■																											
a60E1	N/A	■																											
a6226	N/A	■																											
a7035	N/A	■																											
a7240	N/A	■																											
a7245	N/A	■																											
a7750	7500031	■																											
	<p>Side weight kit 170 kg 5+5 The side weights are 17 kg each and provides a total counterweight of 170 kg. The side weights are mounted on both sides of the machine as a kit with a total of 10 plates (5+5). This combination is not recommended together with the Bottom armour HD.</p>	<table border="0"> <tr><td>755 xc</td><td>N/A</td><td>■</td></tr> <tr><td>a6020</td><td>N/A</td><td>■</td></tr> <tr><td>a6026</td><td>N/A</td><td>■</td></tr> <tr><td>a60E1</td><td>N/A</td><td>■</td></tr> <tr><td>a6226</td><td>N/A</td><td>■</td></tr> <tr><td>a7035</td><td>N/A</td><td>■</td></tr> <tr><td>a7240</td><td>N/A</td><td>■</td></tr> <tr><td>a7245</td><td>N/A</td><td>■</td></tr> <tr><td>a7750</td><td>7500061</td><td>■</td></tr> </table>	755 xc	N/A	■	a6020	N/A	■	a6026	N/A	■	a60E1	N/A	■	a6226	N/A	■	a7035	N/A	■	a7240	N/A	■	a7245	N/A	■	a7750	7500061	■
755 xc	N/A	■																											
a6020	N/A	■																											
a6026	N/A	■																											
a60E1	N/A	■																											
a6226	N/A	■																											
a7035	N/A	■																											
a7240	N/A	■																											
a7245	N/A	■																											
a7750	7500061	■																											
	<p>Bottom armour HD Steel plates mounted under the machine where the rear plate is thicker and work as a counterweight. The rear steel plate has a total weight of 92 kg and increases the stability without the machine increasing in length.</p>	<table border="0"> <tr><td>755 xc</td><td>N/A</td><td>■</td></tr> <tr><td>a6020</td><td>N/A</td><td>■</td></tr> <tr><td>a6026</td><td>N/A</td><td>■</td></tr> <tr><td>a60E1</td><td>N/A</td><td>■</td></tr> <tr><td>a6226</td><td>N/A</td><td>■</td></tr> <tr><td>a7035</td><td>N/A</td><td>■</td></tr> <tr><td>a7240</td><td>N/A</td><td>■</td></tr> <tr><td>a7245</td><td>N/A</td><td>■</td></tr> <tr><td>a7750</td><td>7500030</td><td>■</td></tr> </table>	755 xc	N/A	■	a6020	N/A	■	a6026	N/A	■	a60E1	N/A	■	a6226	N/A	■	a7035	N/A	■	a7240	N/A	■	a7245	N/A	■	a7750	7500030	■
755 xc	N/A	■																											
a6020	N/A	■																											
a6026	N/A	■																											
a60E1	N/A	■																											
a6226	N/A	■																											
a7035	N/A	■																											
a7240	N/A	■																											
a7245	N/A	■																											
a7750	7500030	■																											

Wheels

Tire GR

Densely patterned tire. Soft tire that is gentle to surfaces and grips well. Suitable for work on soft ground like grass, gravel paths and roads. The tire is also good on snow and ice.

Tire TR

Tractor patterned tire. Provides good traction and is suitable for softer surfaces such as soil, sand, and gravel. Tread pattern is designed to keep the tire clean while driving on wet surfaces.

Tire IN

Durable multi-purpose tire that can withstand heavy loads. Suitable for work on harder surfaces such as asphalt, concrete, and hard packed gravel.

755xc



23 x 8,5 - 12 GR
99 cm
7001856



23 x 10,5 - 12 GR
110 cm
7001857



23 x 6,5 - 12 TR
93 cm
7008278



23 x 8,5 - 12 TR
103 cm
7001855



23x8,5-12 IN
105 cm
7500437

a6020

a6026

a60E1

a6226



23 x 8,5 - 12 GR
99 cm
7007037



23 x 10,5 - 12 GR
113 cm
7004513



23 x 12,5 - 12 GR
125 cm
7004512



23 x 10,5 - 12 TR
113 cm
7500439



23 x 8,5 - 12 IN
99 cm
7004510

a7035

a7240

a7245



320/55 - 15 GR
127 cm*
7004565



320/55 - 15 TR
127 cm*
7500440



320/60-12 TR
127 cm*
7004563



27 x 8,5 - 15 IN
105 cm**
7006083



400/45-15,5 IN
142 cm***
7006348

a7750



320/55 - 15 GR
127 cm
7500374



320/55 - 15 TR
127 cm
7500373



320/60-12 TR
127 cm
7500372



27 x 8,5 - 15 IN
105 cm
7500442



400/45-15,5 IN
142 cm
7500375

a7035: *122 cm, **100 cm, ***137 cm



Oy Norcar Ab
Fabriksgatan 7
FI-66900 Nykarleby
FINLAND

Tel. +358 (0)6 7812 844
info@norcar.com



norcar

www.norcar.com